


**Radio Shack**  
**Super Value days!**

**Get maximum performance from your CB with a MICRONTA® CB tester**

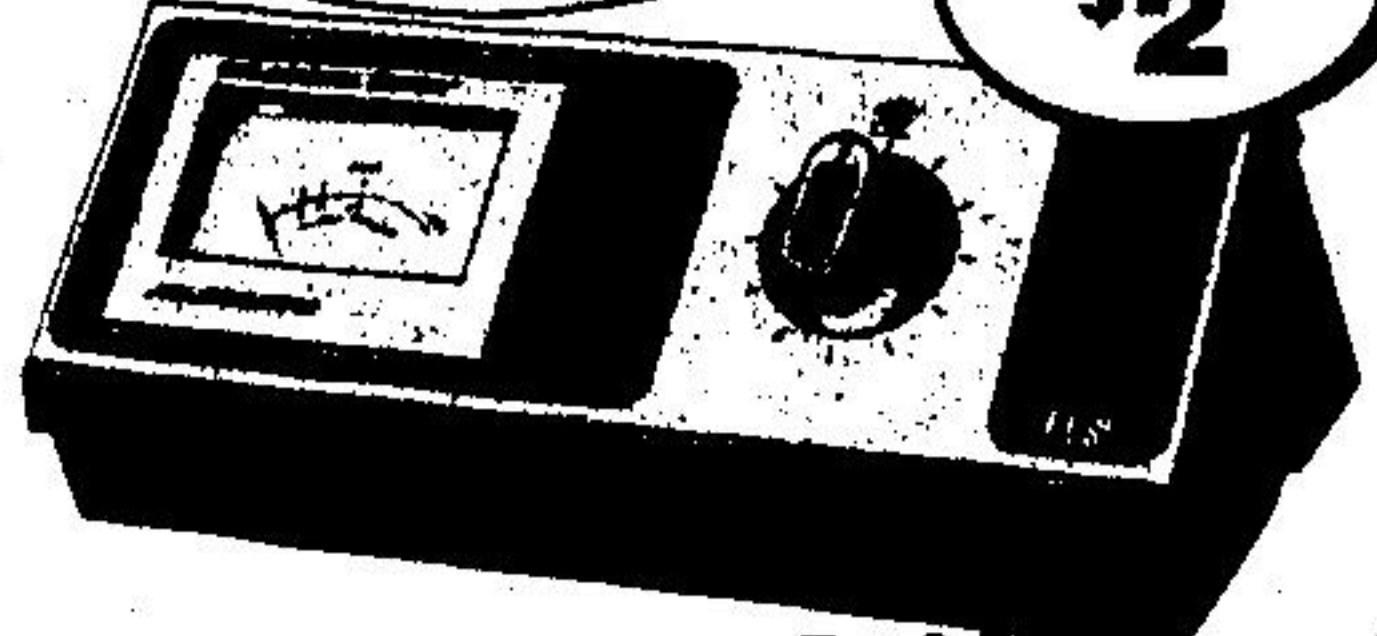

**2-position switch/SWR** **2495**  
 Reg. 26.95

Handy for all antenna adjustments. Lets you change from a beam to an omnidirectional antenna and check SWR without switching leads. Shows percentage of reflected power from 0-25%. Handles up to 500 watts of RF power. Requires no external power source. 50/52 ohms. 1-7/8 x 7-7/8 x 2-1/2". 21-521



**3-range power/SWR tester** **3995**  
 Reg. 49.95

Check your transmitter and antenna for top efficiency. Dual meter tester measures power output in 3 ranges: 0-10 watts for CB and 0-100 and 0-1000 for Ham and business band transceivers. An SWR meter measures the efficiency of your antenna system, forward and reflected power. No need to disconnect — cable can be left permanently in transmission line. Requires no external power. Tester, 3-3/8 x 8-1/4 x 4-1/2". With remote coupling unit. Covers 3-30 MHz. 50/52 ohms. 21-520




**3-range power/modulation/SWR tester** **4295**  
 Reg. 46.95

Measures power output in 3 ranges! 0-5 watts for CB and 0-50 and 0-500 for amateur band equipment. Measures percent of modulation from 0-120%. Covers 3-30 MHz. An SWR meter checks antenna system. A monitor jack lets you listen to your signal with an earphone. No need to disconnect — can be left permanently in the transmission line. Tester 3-3/8 x 8-1/4 x 4-1/2". With remote coaxial coupling unit. 50/52 ohms. 21-522




**save \$5**  
**A** **3495**  
 Reg. 39.95

**A RETRACTABLE CB ANTENNA.** Your automatic answer to CB rip-offs — it disappears into fender electrically. Has a centre-loading coil. Adjustable SWR. Overall extended antenna length 34". With 20' cable, hardware & instructions. For 12VDC neg. grd. 21-970. Reg. 39.95 Sale 34.95

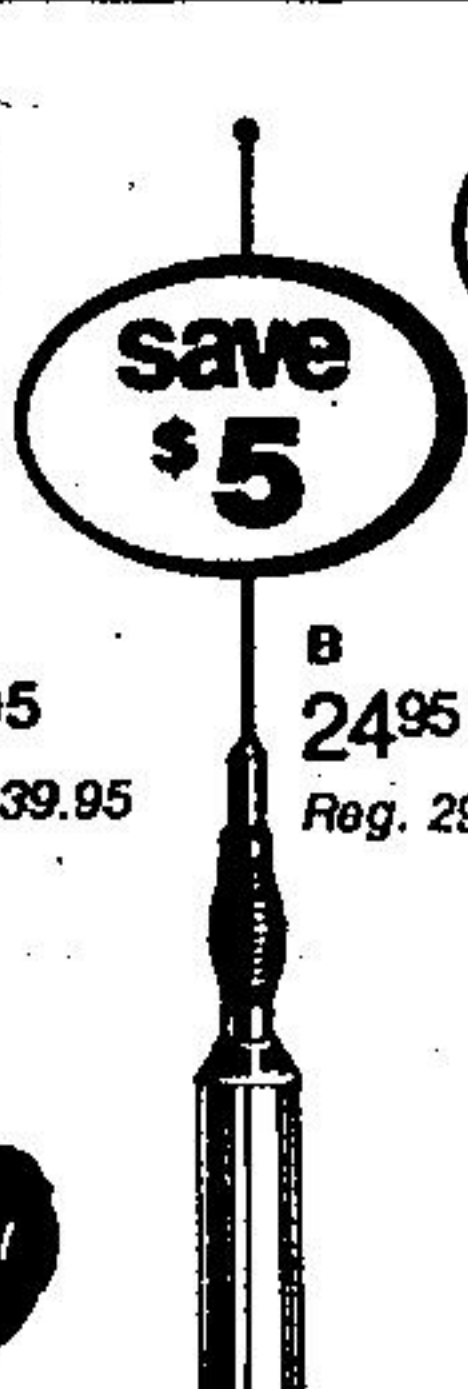


**save \$5**  
**B** **2495**  
 Reg. 29.95

**B NO-HOLE TRUNK MOUNT ANTENNA.** Mount it on centre or either side of trunk lid and secure with 2 set screws. Easy cable entry. Has base-loading coil & stainless steel shock spring & whip. With 16' of coax cable & connector. 21-908. Reg. 29.95 Sale 24.95

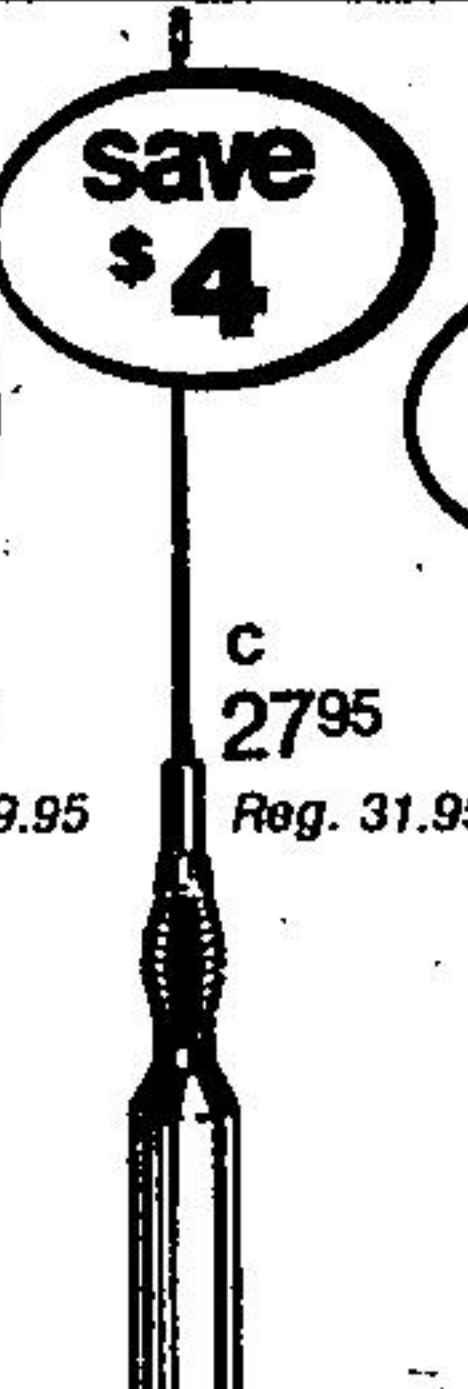

**save \$4**  
**C** **2795**  
 Reg. 31.95

**C FIBERGLASS ROOF-MOUNT ANTENNA.** Mounts on fender or trunk

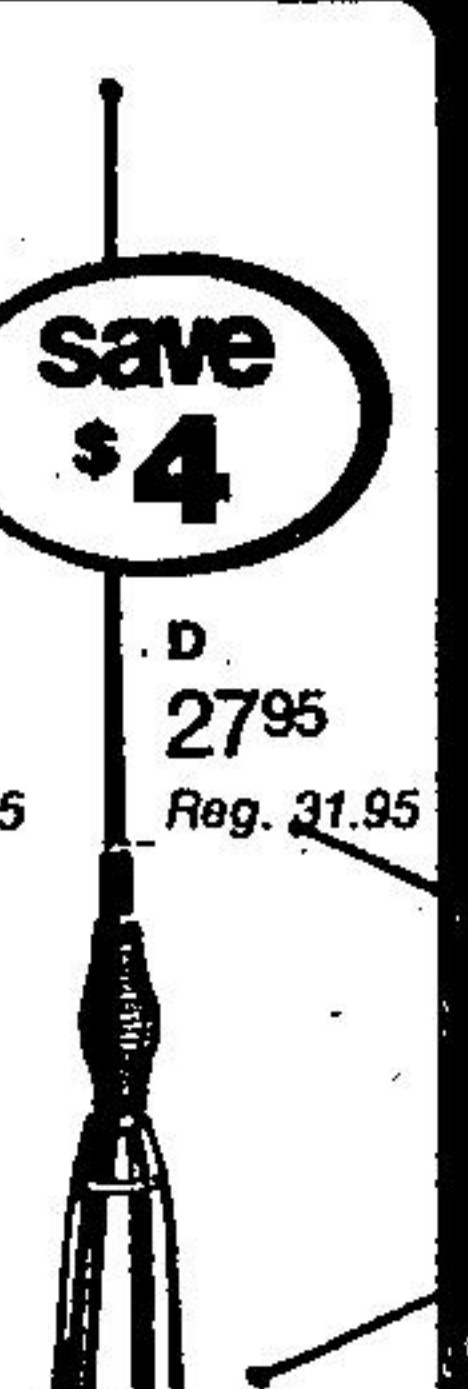


**save \$4**  
**D** **2795**  
 Reg. 31.95

**D BASE-LOADED MAGNETIC MOUNT ANTENNA.** No holes to drill. Mounts on flat metallic surface. Run cable & connect to CB set. Heavy-duty stainless steel shock spring is stable at highway speed with right amount of give under sharp stress. Coil hermetically sealed. With 16' coax cable & connector. 21-940. Reg. 31.95 Sale 27.95




**save \$2**  
**E** **1795**  
 Reg. 19.95

**E 1/4 - WAVE ANTENNA.** For high performance & efficiency! Omnidirectional pattern. 3-108" quarterwave radials, plus quarterwave radiator (vertical element). "U" clamp fits masts up to 1-5/8" dia. Static discharge arrester. Terminates with SO-239 connector — mates with PL-259 plug. Beta-matched for very low SWR. 21-901. Reg. 19.95 Sale 17.95

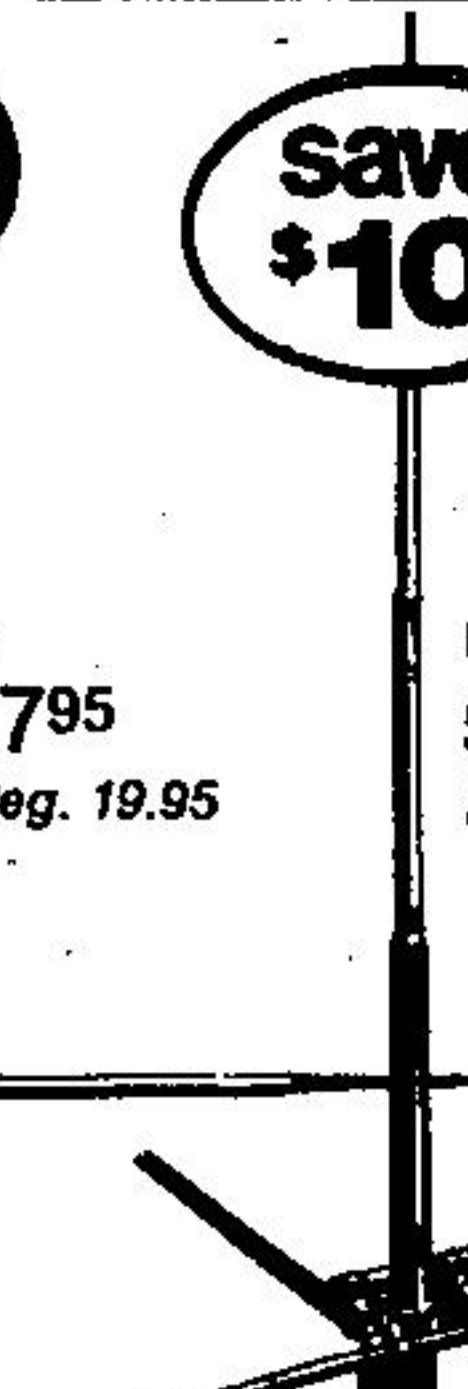

**save \$10**  
**F** **5495**  
 Reg. 64.95

**F 5/8-WAVE ANTENNA.** Omnidirectional CB antenna gives you longest range possible. 5-section vertical radiator is over 22 feet long and four 9' radials provide maximum electrical performance. Vertically polarized. Delivers 4-1/2 dB gain in all directions. Moisture-sealed coil for years of trouble-free service. Triple "U" clamp bracket fits masts up to 1-5/8" dia. Terminates with SO-239 connector — accepts PL-259 plug. 21-964 Reg. 64.95 Sale 54.95

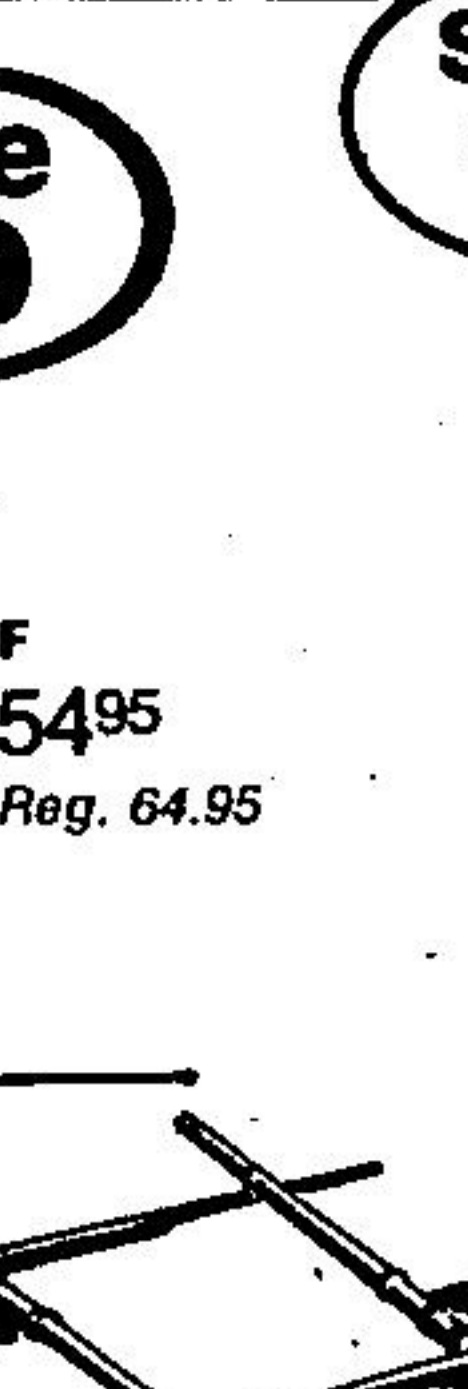

**save \$4**  
**G** **3495**  
 Reg. 38.95

**G 1/2-WAVE ANTENNA.** Multiplies effective radiated power for greater transmit range. Features end-fed 1/2-wave radiator, moisture-protected phasing transformer, 5-section aluminum radials. Omnidirectional pattern. 3.75 dB signal gain. With static discharge arrester & three 52" radials. "U" clamp fits up to 1-5/8 dia. masts. Accepts PL-259 connector. 21-902. Reg. 38.95 Sale 34.95