

SIDEWALK ORDINANCE.

An ordinance providing for the construction of a concrete sidewalk on the westerly side of Lake avenue from the northerly line of Prospect avenue north to the southerly line of Laurel avenue, in the City of Highland Park, County of Lake and State of Illinois:

Be it ordained by the City Council of the City of Highland Park, County of Lake and State of Illinois:

SECTION 1. That a concrete cement sidewalk be constructed in the City of Highland Park in, upon and along the westerly side of Lake avenue from the northerly line of Prospect avenue north to the southerly line of Laurel avenue,

and laid of concrete with cinder foundation, according to the following specifications, directions and provisions, namely:

A sub or earth foundation shall be made by grading and filling so as to bring the same to the grade hereinafter specified, which foundation shall be six feet wide, the inside line or edge thereof shall be distant sixteen inches from the lot or lots upon which such sidewalk touches or abuts and shall be parallel therewith, the inner and outer edges of said foundation to be parallel, which foundation shall be graded and filled as aforesaid so that the same shall have an uniform depth of fifteen and one-half inches below the grade of the surface of the finished sidewalk.

This sub or earth foundation wherever necessary must be consolidated by wetting and ramming so as to give proper stability. Soft and spongy places not affording a firm foundation must be dug out and filled with cinders and well compacted so that when said foundation shall be wet and rammed with iron-shod rammers, eight inches square and weighing twenty pounds, the same shall have the grade aforesaid.

Over and upon this entire sub-foundation there shall be spread and laid a bed of clean boiler cinders which shall constitute the cinder foundation for said walk. Said cinder foundation shall be ten inches in depth along the center line thereof and increasing gradually in depth to within six inches of the sides of said cinder foundation, where the same shall be eleven inches in depth, and from thence shall maintain said depth to the sides thereof.

Said cinder foundation shall be thoroughly puddled with water and compacted and leveled by ramming with rammers as aforesaid so that the first layer of concrete work to be laid on the same as hereinafter provided shall have a clear thickness of four and one-half inches along the center line of said cinder foundation and diminishing gradually and regularly in thickness to the edges of said finished concrete walk as hereinafter provided, where the thickness thereof shall be three and one-half inches.

Over this cinder foundation there shall then be spread a layer of concrete five feet wide so that the center line thereof shall be the same as the center line of said cinder foundation and so constructed that the inside line or edge of said concrete when completed shall be at a distance of twenty-two inches from the lot or lots on which such sidewalk touches or abuts and shall be parallel therewith, the inner and outer edges of said sidewalk to be parallel, which layer of concrete shall be four and one-half inches thick in the center thereof and diminishing gradually and regularly in thickness to the edges of said finished concrete walk, where the same shall be three and one-half inches in thickness. Said concrete shall be thoroughly rammed over its whole surface with iron-shod rammers of the size and weight aforesaid.

Said concrete work shall be made by thoroughly incorporating in a dry state one part of best Portland cement, or a cement equal in kind, quality and efficiency, two parts of clean torpedo sand and five parts of crushed lime-

stone, which limestone shall measure not more than one inch in any dimension and not less than one-quarter of an inch in any dimension, which shall be thoroughly mixed together, and after which just sufficient water to wet the mass shall be so added that when it is rammed in place in manner as aforesaid a film of moisture shall appear on the top.

Upon said concrete shall be laid a top surface or finishing layer which shall be one inch in thickness and shall be composed of two parts of best Portland cement, or cement equal in kind, quality and efficiency, and three parts of clean torpedo sand, which shall be mixed to the proper consistency with water and spread smoothly before said first layer has set and thoroughly trow-

ed. All sand and stone used upon said work shall be clean, free from dirt, dust, loam and any foreign matter whatever and shall be kept thoroughly dry until used.

Said sidewalk shall be laid in sections or blocks of five feet runway length, enclosed in wooden forms and said blocks shall be laid alternately, leaving the intervening space until all alternate blocks are laid and cement set.

Any part of said sidewalk which shall intersect a driveway or carriage entrance to any lot, tract or parcel of land touching upon the line of said walk shall be constructed as above, except the thickness of the first layer of concrete for the width of such driveway shall be five and one-half inches in the center and diminishing to the edges as aforesaid, where the same shall be four and one-half inches, and the depth of said cinder foundation shall be nine inches in the center and increasing gradually to within six inches of the edges of said foundation, where the same shall be ten inches and continue thence to said edges, and the thickness of said finishing or top layer shall be one inch throughout, which finishing layer, including the flange hereinafter mentioned, shall be fluted for the full width of said driveway or entrance with lines four inches apart, parallel with each other and with the edges of said sidewalk. And provided further that

the finished walk at said driveway entrance and extending eighteen inches into the same a projection or flange of concrete of layers made as aforesaid, the thickness of the first or bottom layer to be four and one-half inches and of the top layer to be one inch shall be constructed in such manner that said flange shall slope down from the edge of said sidewalk nearest to it to the surface of the driveway. Which concrete shall be laid on a cinder foundation made as aforesaid and eleven inches in depth and so constructed as to permit the concrete to be depressed down to said driveway as above provided. For said flange or projection and its cinder foundation there shall be made an earth or sub-foundation in manner as aforesaid, the size of said foundation to correspond with the dimensions of said flange or projection. Said sub or earth foundation shall have a sufficient depth to accommodate the cinder and concrete foundations to be laid thereon as aforesaid for such flange or projection, and so the same can be depressed as aforesaid.

Said sidewalk shall be so constructed that the grade of the top of said finished walk nearest the lot line shall when completed, be the grade of the walk at the intersection of the west line of Lake avenue and the north line of Prospect avenue and shall be 24 inches above the grade of the center line of the pavement on Lake avenue at a point opposite said intersection, from thence northward to the south bank of the ravine it shall gradually fall, being at said south bank of the ravine 18 inches above the grade of the center line of Lake avenue pavement at the intersection of the north bank of ravine and the west line of Lake avenue the grade of the sidewalk shall be 14 inches above the grade of the center line of Lake avenue pavement, from thence it shall rise gradually to the

south line of Laurel avenue, at which place the grade of walk shall be the same as the grade of walk now laid on the south side of said Laurel avenue, and from said inner line or edge of of said walk the surface of said finished walk shall slope gradually towards the street with a fall of one-third of an inch for each foot in width of said walk.

Provided, however, that the owner of any lot or parcels of land touching upon the line of said proposed sidewalk shall be allowed thirty days after this ordinance shall have been published in which to construct said sidewalk along side of his lot or piece of ground, and thereby relieve the same from the special tax herein provided to be levied thereon for the construction of said

Said materials and construction shall be under the supervision of and subject to the approval of the Foreman of Street Work of the City of Highland Park.

SEC. 2. That so much of said improvement as shall not be made by said owners within the time aforesaid shall be made by said City and the cost thereof be wholly paid for by special taxation of the lot, lots or parcels of land contiguous to and touching upon the line of so much of the proposed sidewalk as shall be built by said City by levying the whole cost thereof upon such lot, lots or parcels of land in proportion to their respective frontages on said proposed sidewalk, built as aforesaid.

SEC. 3. A bill of the cost of so much of said sidewalk as shall be built by said City, showing in separate items the cost of grading, materials, laying down and supervision, shall be filed in the office of the City Clerk of the City of Highland Park, certified to by the foreman of street work of said City, together with a list of the lots or parcels of land touching upon the line of said sidewalk, the names of the owners thereof, and the frontages thereof as well. Whereupon the said City Clerk shall prepare a special tax list against such lots or parcels of land and the owners thereof, ascertaining by computation

the amount of special tax to be levied against each of said lots or parcels and the owners thereof, on account of the construction of said sidewalk, in proportion to the frontages of each of said lots on said sidewalk, which special tax list the City Clerk of the City of Highland Park shall place on file in his office; and the said City Clerk shall thereupon issue warrants, directed to the City Collector, for the collection of the amount of special tax so ascertained and appearing from said special tax list to be due from the respective owners of the lot, lots or parcels of land touching upon the line of said sidewalk, and said City Collector shall proceed to collect said warrants by making a demand therefor upon the owners respectively of the lots or parcels of land touching upon the line of said sidewalk, if they shall be found in the City of Highland Park, and to make return thereof, with the moneys collected thereon, to the City Clerk of the City of Highland Park sixty (60) days from the date of the issue of said warrants, in the manner provided in Section Three (3) of the act of the General Assembly of the State of Illinois, entitled "An act to provide additional means for the construction of sidewalks in cities, towns and villages," in force July 1, 1875.


SECTION 4. In case of failure to collect said special tax in the manner aforesaid the City Clerk shall within one year thereafter, make a report of all such special taxes, in writing, to the County Treasurer and Ex-Officio County Collector of Lake County, of all the lots or parcels of land upon which such special tax shall be so unpaid, with the names of the respective owners thereof, so far as the same are known to him, and the amount due and unpaid upon each tract, together with a copy of this ordinance, in the manner prescribed by Section Four (4) of the act of the General Assembly of the

State of Illinois, entitled "An act to provide additional means for the construction of sidewalks in cities, towns and villages," in force July 1, 1875.

SECTION 5. This ordinance shall be in force from and after its passage and due publication.

Passed April 1st, 1902.
Approved April 3d, 1902.
ROBERT G. EVANS,
Mayor.

Attest: JOHN FINNEY, City Clerk.

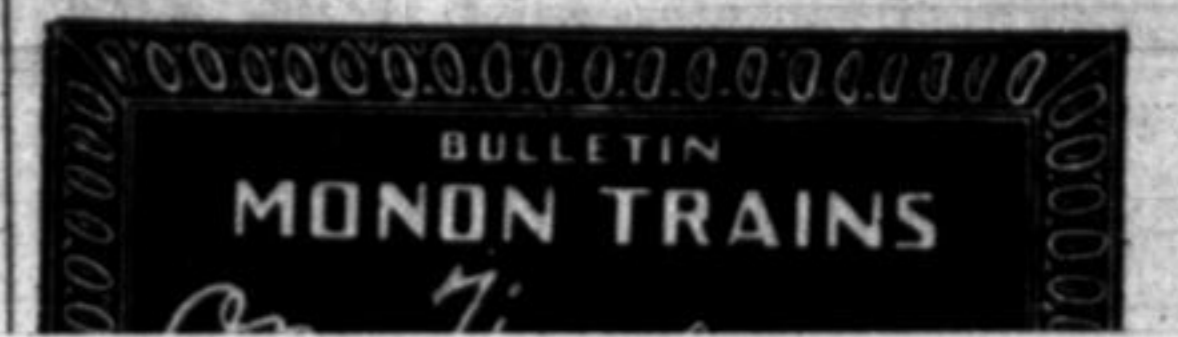

MONON ROUTE
C. H. & D. Rwy.
THE DIRECT LINE BETWEEN
CHICAGO,
INDIANAPOLIS
AND
CINCINNATI.
4 Trains daily
CITY OFFICE 232 CLARK ST.
CHICAGO



HOMESEEKERS' EXCURSIONS CALIFORNIA
AND
Great Southwest
\$33 FROM CHICAGO
\$30 FROM ST. LOUIS
\$25 FROM KANSAS CITY
One Way, second class, daily, during March and April, to San Francisco, Los Angeles and other California points; also to Prescott, Phoenix and other Arizona points.
ONE FARE PLUS \$2 ROUND TRIP
March 4 and 18, April 1 and 15, May 6 and 20. From Chicago, St. Louis and Kansas City to Kansas, Oklahoma, Texas, Colorado, New Mexico, Arizona and California.
Corresponding rates from east generally. Ask your home agent. Through sleepers and chair cars to California over the Santa Fe, the comfortable and quick way to go. Write for free illustrated land pamphlets.
These spring excursions will enable you to personally inspect the many advantages offered homeseekers and investors in the great Southwest and California. Particular attention is invited to irrigated lands in Arkansas Valley of Colorado, Pecos and Rio Grande valleys of New Mexico, Salt River Valley of Arizona, and San Joaquin Valley of California.
GENERAL PASSENGER OFFICE
Atchison, Topeka & Santa Fe Ry. System
CHICAGO