

Maintenance-Free Dual-Duty Power Plus




Features a 42-Month FREE Replacement Guarantee

56⁹⁵ Exchange Price GROUP 22F
59⁹⁵ Full Price GROUP 22F

Never needs maintenance under normal conditions. New technology and superior materials result in extra power for dependable cold winter starts, reduced gassing and evaporation. Almost corrosion-free tough, reinforced polypropylene case. 10-2201X

Sample Listings Only - Similar, low prices on other popular makes. Installation \$1.50	Exchange Price	Full Price
GROUP 22F: 69-78 American Motors 6-cyl. & V8 290; 304; 63-69 Chevelle, Nova, Beaumont, Camaro 4 & 6-cyl.; V8 283 & 307	56:95	59:95
GROUP 24 & 24F: 63-70 Chev. Cdn.; Pontiac 8; GMC 6-cyl. & V8 283; 56-79 Chrysler 6-cyl. & V8 273, 318, 340, 360, 383, 400	69:95	72:95
GROUP 27 & 27F: 63-70 Buick V8 401, 425, 430; 65-70 Oldsmobile V8 400, 425, 455	77:95	80:95
GROUP 72: 1971-76 Chevrolet all 6-cylinder engines (with side terminal battery)	62:95	65:95
GROUP 74: 71-76 Chev. Cdn.; Pontiac & GMC trucks 8-cyl. with side terminal battery	69:95	72:95

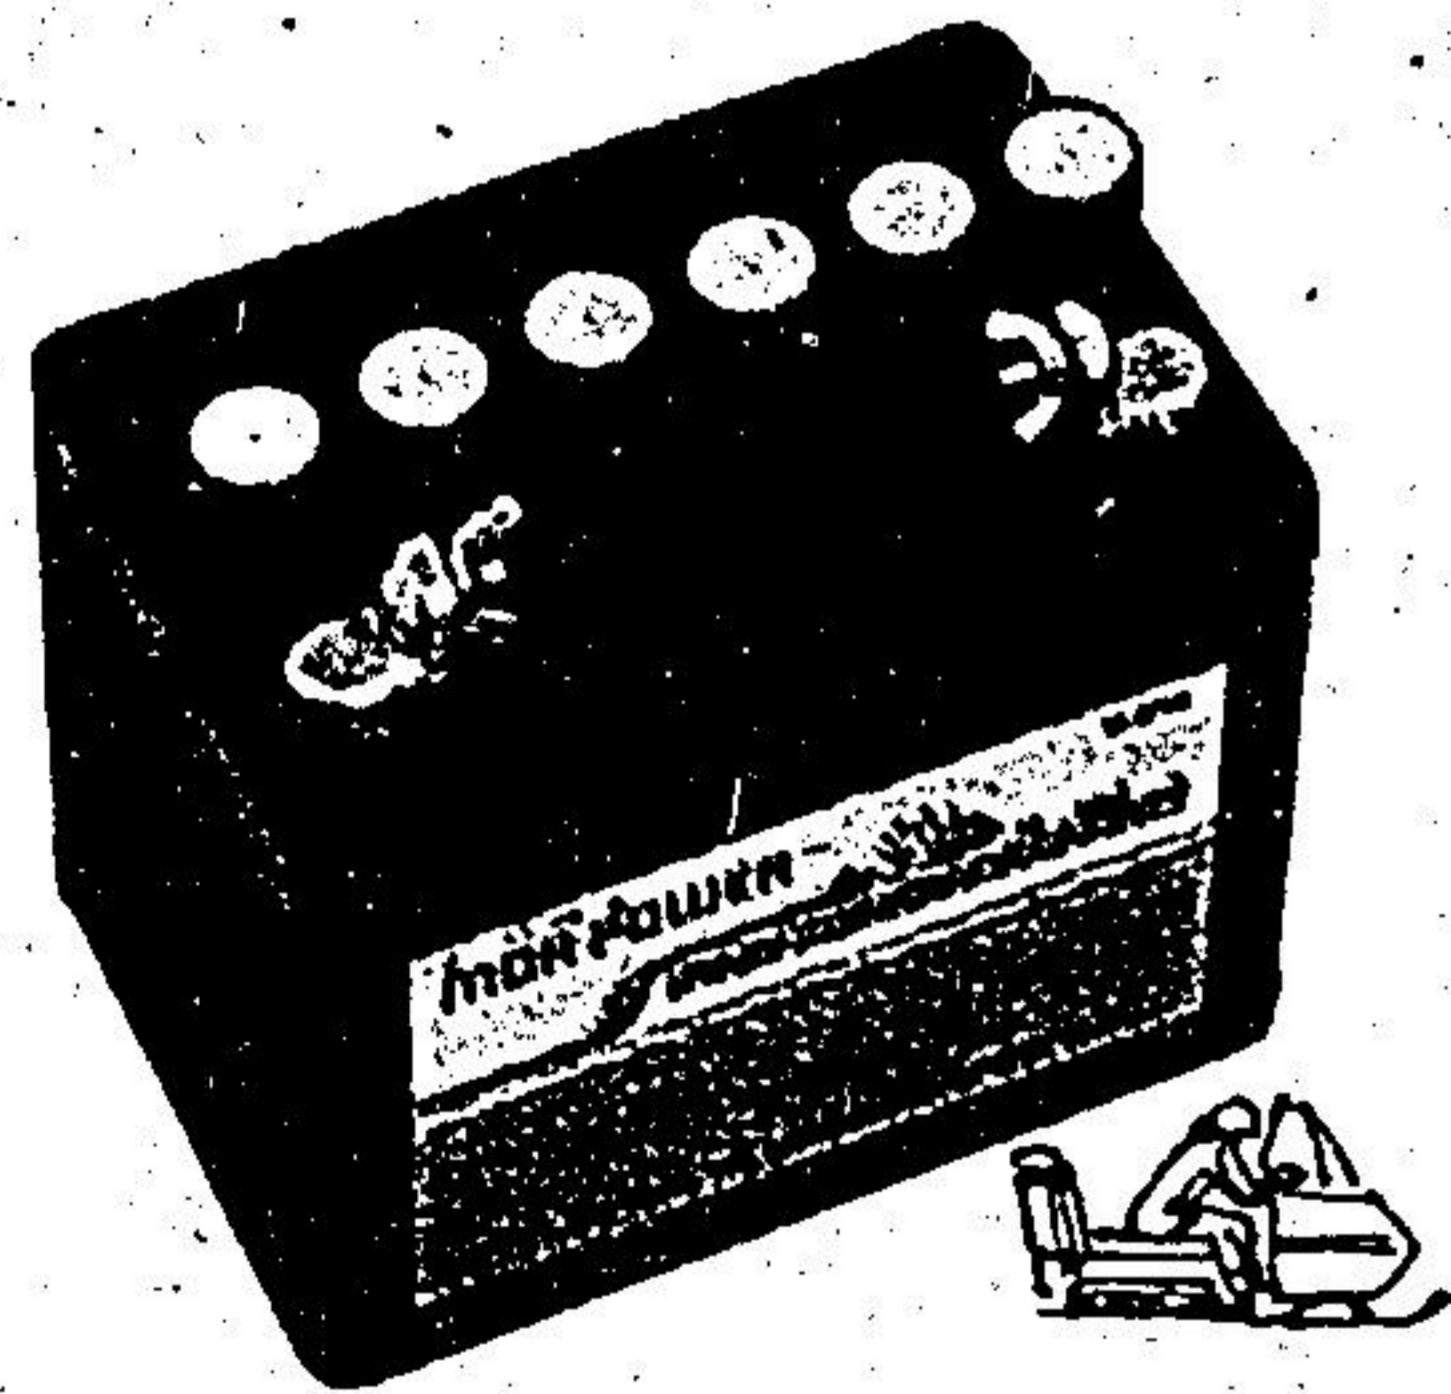

Snowmobile Battery

With 18-Month Free Replacement Guarantee

47⁹⁹ Exchange
50⁹⁹ Full Price

The Mor-Power Anti-Spill Battery features epoxy-anchored elements to provide top performance under extreme vibration. L-type terminals with wing nuts and anti-corrosion covers. Minimum 200 cranking amps at 0°F (-18°C). 10-2050

Tilt-Up Engine Analyzer

Professional-type

79⁹⁵



10-Function Diagnostic Analyzer features a tilt-up, bench-size meter section for easy reading. Tilts back to hold in hand. Plug-in leads eliminate danger of extra leads getting in way. Overload protected. With electronic ignition hook-up. 25-1050

Voltage Tester and Probe

13⁹⁵



Professional-Type Unit tests shorts in 6 or 12V wiring. Features a hook-end to maintain wire contact while you complete circuit - also allows convenient two-handed testing. Fully insulated. 25-1056

Low-Priced Volt Tester/Probe

Do-It-Yourself's Helper

6³⁹

Finds shorts in 6 and 12-volt wiring and bulbs. Also comes in handy for finding 'live' wires in trailer-connection installations. 3-ft lead wire allows for plenty of manoeuvrability. 25-1055